HER0 375

EcoWater Series • Drinking Water Systems







Reverse Osmosis Cartridge Recycling.

EcoWater Canada is pleased to introduce the first ever recycling program specifically designed for used EcoWater Reverse Osmosis (RO) water filtration cartridges.

Simply return your used RO cartidges to your local EcoWater Dealer and we'll do the rest.

Reverse Osmosis Drinking Water System

HERO 375

The HERO 375 Reverse Osmosis (RO) system provides high-quality water for worry free drinking and cooking. This state-of-the-art filtration system will improve water quality for well or municipal water supplies.

How an RO works:

- 1 Household water is directed through a prefilter for filtration to remove sediment, chlorine taste and odor, and particulate matter.
- 2 The water is then forced, by pressure, through a semi-permeable membrane where a high percentage of the dissolved solids, etc. are rejected and flushed to the drain.
- 3 Filtered water is reserved in the storage tank until needed. An activated carbon absorption block filter that removes tastes and odors polishes the water immediately before going to the faucet.

Features:

- Patented HydroLink[™] communication technology allows for the remote display of valuable product performance, water usage and filter life information when installed in conjunction with the EcoWater Series 3500 product line.
- Unique and elegant chrome, brushed nickel, white, black, or oil-rubbed bronze faucet finishes.
- Industry rated, 50 gallons per day membrane production rate, (actual production rate will vary depending on water usage and conditions).
- The filters are enclosed for cleaniness and ease of replacement.
- Changing filters does not require turning off the water, a simple 1/4 turn of the filter shuts off the water and the filter is released at the same time.
- A light is mounted in the base of the faucet indicating when filters and membrane need to be replaced.

Options:

- System is expandable if additional filters need to be added.
- Additional filter selections are available, including higher capacity sediment, or a Volitile Organic Compound (VOC) rated filter.
- The membrane can be upgraded to a 75 gallon per day membrane.
- Adapter kits are available to easily add a permeate pump system, which provides improved flow rates at the faucet.
- Booster pump system is available in applications where the home pressure can drop below 40 PSI.

Bronze





A Marmon Water / Berkshire Hathaway Company

Brushed White Nickel

ECOWATER.CA

HERO 375

Specifications

Feed water pressure (minmax.)	40-100 psi
Feed water temperature (minmax.)	40-100°F
Maximum Total Dissolved Solids (TDS)	2,000 ppm
Membrane percent rejection of TDS (min.)	95%
System product water production rate	
(gal. per day)*	17.4
Feed water pH limits	4-11 pH
Maximum iron	0
Maximum hydrogen sulfide	0
Type of membrane	thin film composite
Prefilter (sediment/chlorine)	block carbon
Postfilter (taste and odor)	block carbon
Optional Filters:	
VOC	block carbon
Sediment Filter	polypropylene fibers
High-flow membrane	thin film composite
Permeate pump adaptor	
Storage tank capacity	3.1 gal.
Automatic shut off valve	yes
Shipping weight	22 lbs.

HERO 375

Typical impurities reduced by an EcoWater Reverse Osmosis Drinking Water System Model HERO 375 TFC System.

 Ammonia¹ Arsenic Asbestos Barium Bicarbonate¹ Bromide¹ Cadmium Chloride¹ Chromium (Hex) Chromium (Tri) Chlorine 	 Cysts (Giardia/Cryptosporidia) Lead Magnesium¹ Nitrate/Nitrite Radium 226/228 Selenium Sodium¹ Sulfate¹ Tannin¹ TDS Turbidity Zinc¹ 	
Copper	• Zinc ¹	
ested and Certified to NSF/ANSI Standard 58 by NSF International. ated at 50 psi, 77°F, 750 ppm/TDS, product to storage tank.		


Tested and Certified to NSF/ANSI Standard 58 by NSF International. Rated at 50 psi, 77°F, 750 ppm/TDS, product to storage tank. Product water produced, amount of waste water and percent rejection will vary with changes in pressure, temperature and total dissolved solids.


¹Tested by Spectrum Labs, Inc. a state certified testing laboratory.

*Tested to NSF/ANSI Standard 58.

ERO 375: For chlorinated and non-chlorinated water supplies.

Chlorine levels must not exceed 2.0 ppm



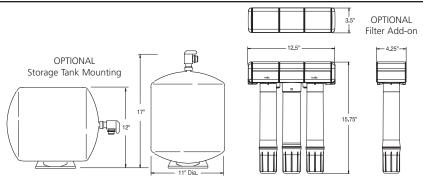

Warranty:

- Five years on the reverse osmosis drinking water system for defects in material and workmanship, and 10 years on the storage tank.
- Exclusions to five years, one year on reverse osmosis membrane, and three years on faucet and electronics.
- The service life of the membrane and filter cartridges is dependent on the feedwater quality. Filters are not covered by the warranty.

Your Authorized EcoWater Dealer:



This drawing illustrates some of the customizable filter connection options the ERO 375 has to offer. Additional filter(s) may be added on to either side of standard unit.

- Optional sediment filter available
- Optional NSF Certified VOC* filter available

*VOC = Volatile Organic Compounds, 51 compounds in all, including MTBE, Atrazine, Benzene, Carbon Tetrachloride, 2,4-D, Toluene, Trihalomethanes, and Xylenes





EcoWater Canada Ltd. 5240 Bradco Blvd. Mississauga, Ontario Canada L4W 1G7

850756H

Printed in Canada

EcoWater Canada Ltd.

ECOWATER.CA

02/08